

KingSlide Sidemount Series

3301 - Full Extension Standard Ball Bearing Slide



Specifications

Length: 10"-39" (250mm-900mm)

Height: 45 mm (1.77")

Side Space: 12.7 mm
(+0.5mm-0mm)

Travel: Full Extension

Mount: Sidemount

Load: 45 kg (100 lb.) Pair (Max)

Disconnect: Lever Disconnect

Finish: Zinc Plated or Black

Material: Cold Rolled Steel

Packaging: 15 Pair/Carton

Bulk Pack: 40 pcs/carton for
external, 100 pcs/carton for
internal

Features

- Dual design allows for traditional pull-open preventing damages caused by improper installation and usage
- Ultra smooth with high rigidity and stability design
- 50,000 life cycles guaranteed under proper installation and normal usage

Applications


- Home Cabinets
- Work Stations
- Office Furniture
- Box Drawers

Full Extension Slide

Sidemount Slides Series

Dimensional Specifications

Space Requirements

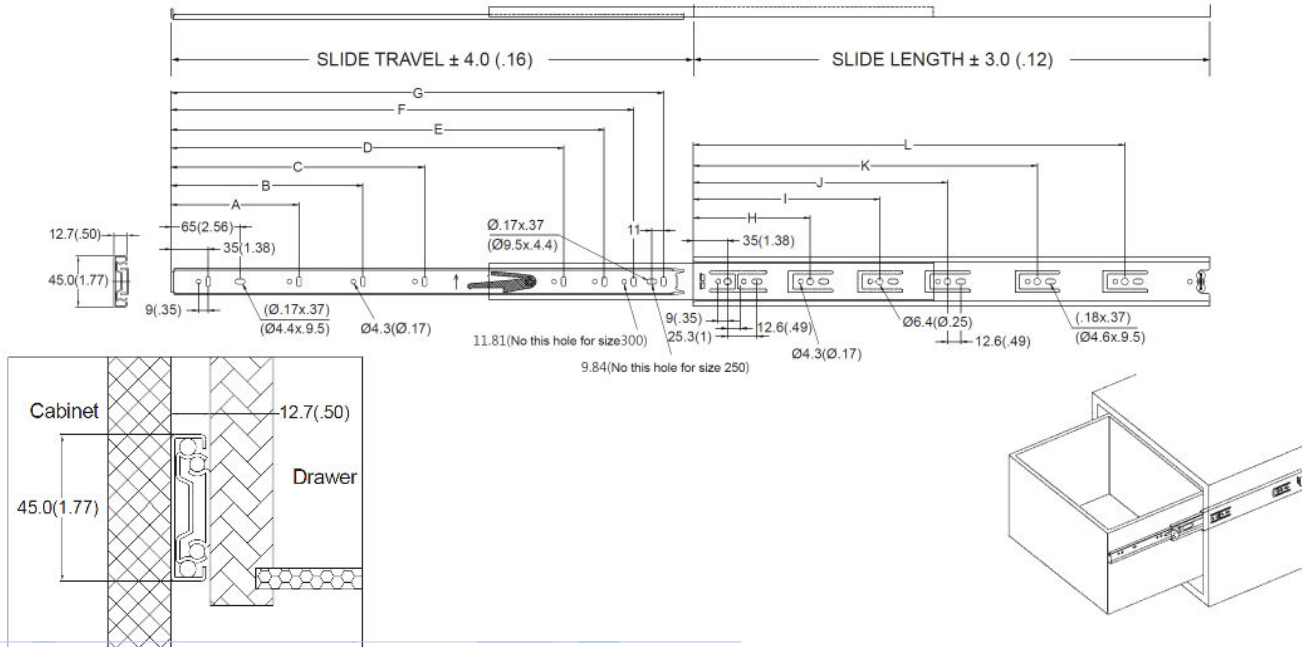

Ordering

Item	Description
280-383	10" - 3301 100lb ball bearing slide
280-809	12" - 3301 100lb ball bearing slide
280-416	14" - 3301 100lb ball bearing slide
280-384	16" - 3301 100lb ball bearing slide
280-384	18" - 3301 100lb ball bearing slide

Item	Description
280-385	20" - 3301 100lb ball bearing slide
280-386	22" - 3301 100lb ball bearing slide
280-810	24" - 3301 100lb ball bearing slide
280-1003	mounting bracket

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Holes Position mm (inch)												
				A	B	C	D	E	F	G	H	I	J	K	L	
3301-200	195.0 (7.67)	225 (8.85)	—	—	—	—	—	—	—	—	—	—	—	—	—	—
3301-250	250.0 (9.84)	250.0 (9.84)	23.0 (50.0)	131 (5.16)	—	—	—	—	—	227 (8.94)	—	—	—	—	—	195 (7.68)
3301-300	300.0 (11.81)	305.0 (12.00)	27.0 (60.0)	163 (6.42)	—	—	—	—	—	255 (10.04)	277 (10.91)	163 (6.42)	—	—	—	259 (10.20)
3301-350	350.0 (13.78)	351.0 (13.82)	34.0 (75.0)	163 (6.42)	—	—	—	—	—	305 (12.01)	327 (12.87)	163 (6.42)	—	—	—	259 (10.20)
3301-400	400.0 (15.75)	403.0 (15.87)	45.0 (100.0)	163 (6.42)	—	—	—	—	—	355 (1.98)	377 (14.84)	163 (6.42)	259 (10.20)	—	—	355 (13.98)
3301-450	450.0 (17.72)	452.0 (17.80)	45.0 (100.0)	163 (6.42)	—	355 (13.98)	—	—	—	405 (15.95)	427 (16.81)	163 (6.42)	259 (10.20)	—	—	387 (15.24)
3301-500	500.0 (19.69)	509.0 (20.04)	45.0 (100.0)	163 (6.42)	259 (10.20)	355 (13.98)	—	—	—	451 (17.75)	477 (18.78)	163 (6.42)	259 (10.20)	—	—	451 (17.76)
3301-550	550.0 (21.65)	563.0 (22.17)	45.0 (100.0)	163 (6.42)	259 (10.20)	451 (17.75)	—	—	—	505 (19.88)	527 (20.75)	163 (6.42)	259 (10.20)	387 (15.24)	—	483 (19.02)
3301-600	600.0 (23.62)	605.0 (23.83)	39.0 (85.0)	163 (6.42)	259 (10.20)	451 (17.75)	—	—	—	555 (21.85)	577 (22.72)	163 (6.42)	259 (10.20)	387 (15.24)	—	515 (20.28)
3301-650	650.0 (25.59)	656.0 (25.83)	32.0 (70.0)	163 (6.42)	259 (10.20)	451 (17.75)	579 (22.80)	—	—	605 (23.82)	627 (24.69)	163 (6.42)	259 (10.20)	387 (15.24)	—	579 (22.80)
3301-700	700.0 (27.56)	707.0 (27.83)	27.0 (60.0)	163 (6.42)	259 (10.20)	451 (17.75)	579 (22.80)	—	—	655 (25.79)	677 (26.65)	163 (6.42)	259 (10.20)	387 (15.24)	—	579 (22.80)
3301-750	750.0 (29.53)	757.0 (29.80)	22.0 (48.0)	163 (6.42)	259 (10.20)	355 (13.98)	579 (22.80)	—	—	705 (27.76)	727 (28.62)	163 (6.42)	259 (10.20)	387 (15.24)	—	579 (22.80)
3301-800	800.0 (31.50)	805.0 (31.69)	18.0 (39.0)	163 (6.42)	259 (10.20)	355 (13.98)	579 (22.80)	—	—	755 (29.73)	777 (30.59)	163 (6.42)	259 (10.20)	387 (15.24)	579 (22.80)	707 (27.83)
3301-900	900.0 (35.43)	999.0 (39.33)	18.0 (39.0)	163 (6.42)	259 (10.20)	387 (15.24)	611 (24.06)	739 (29.09)	855 (33.66)	877 (34.53)	163 (6.42)	259 (10.20)	387 (15.24)	579 (22.80)	771 (30.35)	—