

Sidemount Slide Series

AE52 – Heavy Duty, Full Extension Soft-Close Ball Bearing Slide for Face Frame & Frameless



Specifications

Length: 302 mm to 602 mm (12" to 24")

Travel: Full Extension

Height: 54 mm (2.13")

Side Space: 13.0 mm (+0.5mm-0.3mm)

Max Loading: 50 kg (110 lb/ pair)

Disconnect: Lever

Finish: Clear Zinc or Black

Mount: Side mount

Material: Cold Rolled Steel

Package: 5 pairs/carton



Features

- Ultra smooth gliding motion with high rigidity and stability
- Enhanced silent soft-closing feature with light opening force
- Durable damping system with fast response capability
- 50,000 life cycles guaranteed under proper installation and normal use

Applications



- Wide Lateral File Drawers
- Large Storage
- Drawers
- Toolbox

Full Extension Slide

Sidemount Slides Series

Details

Item	Description
280-977	14" - AE52 - 110 lb. soft-close ball bearing slide
280-978	16" - AE52 - 110 lb. soft-close ball bearing slide
280-979	18" - AE52 - 110 lb. soft-close ball bearing slide
280-980	20" - AE52 - 110 lb. soft-close ball bearing slide
280-981	22" - AE52 - 110 lb. soft-close ball bearing slide
280-982	24" - AE52 - 110 lb. soft-close ball bearing slide
280-981	26" - AE52 - 110 lb. soft-close ball bearing slide
280-981	28" - AE52 - 110 lb. soft-close ball bearing slide

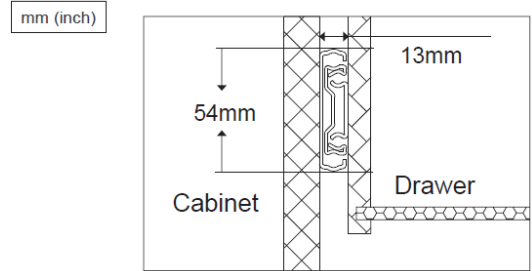

Item No.	Total Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Holes Position mm (inch)					
				A	B	C	D	E	F
AE52-302	302.0 (11.89)	271.5 (10.69)	41 (90)	96 (3.78)	—	—	96 (3.78)	—	—
AE52-352	352.0 (13.86)	332.5 (13.09)	41 (90)	128 (5.04)	224 (8.82)	—	128 (5.04)	—	—
AE52-402	402.0 (15.83)	389.0 (15.31)	45 (100)	128 (5.04)	256 (10.08)	—	128 (5.04)	192 (07.56)	—
AE52-452	452.0 (17.80)	448.0 (17.64)	50 (110)	128 (5.04)	320 (12.60)	—	128 (5.04)	256 (10.08)	—
AE52-502	502.0 (19.76)	498.0 (19.61)	55 (120)	128 (5.04)	224 (8.82)	352 (13.86)	128 (5.04)	256 (10.08)	—
AE52-552	552.0 (21.73)	550.0 (21.65)	55 (120)	128 (5.04)	256 (10.08)	384 (15.12)	128 (5.04)	224 (8.82)	320 (12.60)
AE52-602	602.0 (23.70)	606.5 (23.88)	50 (100)	128 (5.04)	288 (11.34)	416 (16.38)	128 (5.04)	224 (8.82)	352 (13.86)

Installation Specifications

